


A759, Polymer Aluminum, 82 uF, 20%, 250 VDC, -55/+125°C, Lead Spacing = 7.5mm

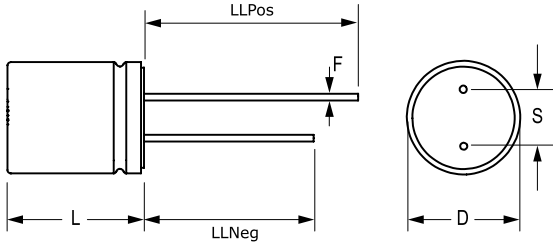

Dimensions

D	18mm +/-0.5mm
L	31mm +/-2mm
S	7.5mm +/-0.5mm
LL Negative	15mm MIN
LL Positive	19mm MIN
F	0.8mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk, Bag
-------------------	-----------

General Information

Series:	A759
Dielectric:	Polymer Aluminum
Description:	Single Ended, Polymer Aluminum
RoHS:	Yes
Lead:	Wire Leads
AEC-Q200:	No
Halogen Free:	Yes

Specifications

Capacitance:	82 uF
Capacitance Tolerance:	20%
Voltage DC:	250 VDC, 287.5 VDC (Surge)
Temperature Range:	-55/+125°C
Rated Temperature:	125°C
Life:	2000 Hrs (+/-20% Initial Capacitance, 1.5x DF MAX, Leakage Within Limit)
Dissipation Factor:	12% 120Hz 20C
Resistance:	150 mOhms (100kHz 20C)
Ripple Current:	3200 mAmps (100kHz 105C), 1750 mAmps (100kHz 125C)
Leakage Current:	3075 uA (2min 20°C)