


C4AQ, Film, Metallized Polypropylene, Automotive DC Link, 27 uF, 5%, 1300 VDC, 70°C, Lead Spacing = 52.5mm

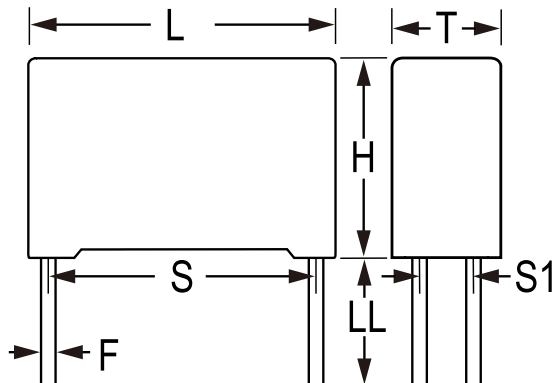

General Information	
Series:	C4AQ
Dielectric:	Metallized Polypropylene
Style:	Radial
RoHS:	Yes
Lead:	4 Wire Leads
Qualifications:	AEC-Q200, IEC61071, EN61071, VDE0560
AEC-Q200:	Yes
Miscellaneous:	Rth = 10 C/W.

Dimensions	
L	57.5mm +0.8/-0.7mm
H	50mm +0.3/-0.7mm
T	35mm +0.5/-0.7mm
S	52.5mm +/-0.4mm
S1	20.3mm +/-0.4mm
LL	6mm +0/-2mm
F	1.2mm +/-0.05mm

Specifications	
Capacitance:	27 uF
Capacitance Tolerance:	5%
Voltage DC:	1300 VDC
Temperature Range:	-55/+105°C
Rated Temperature:	70°C
Dissipation Factor:	0.02% (10 kHz 25C)
Insulation Resistance:	1.11 GOhms
Max dV/dt:	13 V/us
Resistance:	4.9 mOhms (10kHz 70C)
Ripple Current:	22.8 Amps Irms (10kHz 70C), 354 Amps Ipkr
Inductance:	15 nH

Packaging Specifications	
Packaging:	Bulk, Box
Packaging Quantity:	23