


RAD-LDD Indust C0G HT200C, Ceramic, 0.01 uF, 10%, 100 VDC, C0G, High Temp, 200C, Radial Molded, Gold Termination, Industrial Grade, Lead Spacing = 5.08mm

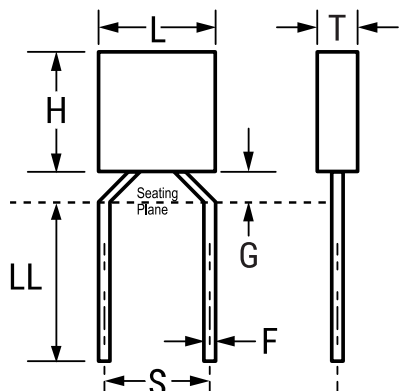

Dimensions	
L	4.83mm +/-0.25mm
H	5.97mm +/-0.25mm
T	2.29mm +/-0.25mm
S	5.08mm +/-0.38mm
LL	31.75mm MIN
F	0.635mm +0.102/-0.051mm
G	1.14mm MAX
K	4.83mm +/-0.25mm

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	100

General Information	
Series:	RAD-LDD Indust C0G HT200C
Style:	Radial
Description:	High Temp, 200C, Radial Molded, Gold Termination, Industrial Grade
Features:	Commercial
RoHS:	With Exemptions
REACH:	SVHC (Pb – CAS 7439-92-1)
SCIP Number:	e1a5b9fc-0de5-4ce0-a6ef-55df071d82eb
Termination:	Gold
AEC-Q200:	No
Halogen Free:	Yes
Component Weight:	493 mg

Specifications	
Capacitance:	0.01 uF
Capacitance Tolerance:	10%
Voltage DC:	100 VDC
Dielectric Withstanding Voltage:	250 VDC
Temperature Range:	-55/+200°C
Temperature Coefficient:	C0G
Dissipation Factor:	2.5%
Aging Rate:	0% Loss/Decade Hour
Insulation Resistance:	100 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.